


Warranty

20 years against structural defects
 3 years on exterior surfaces

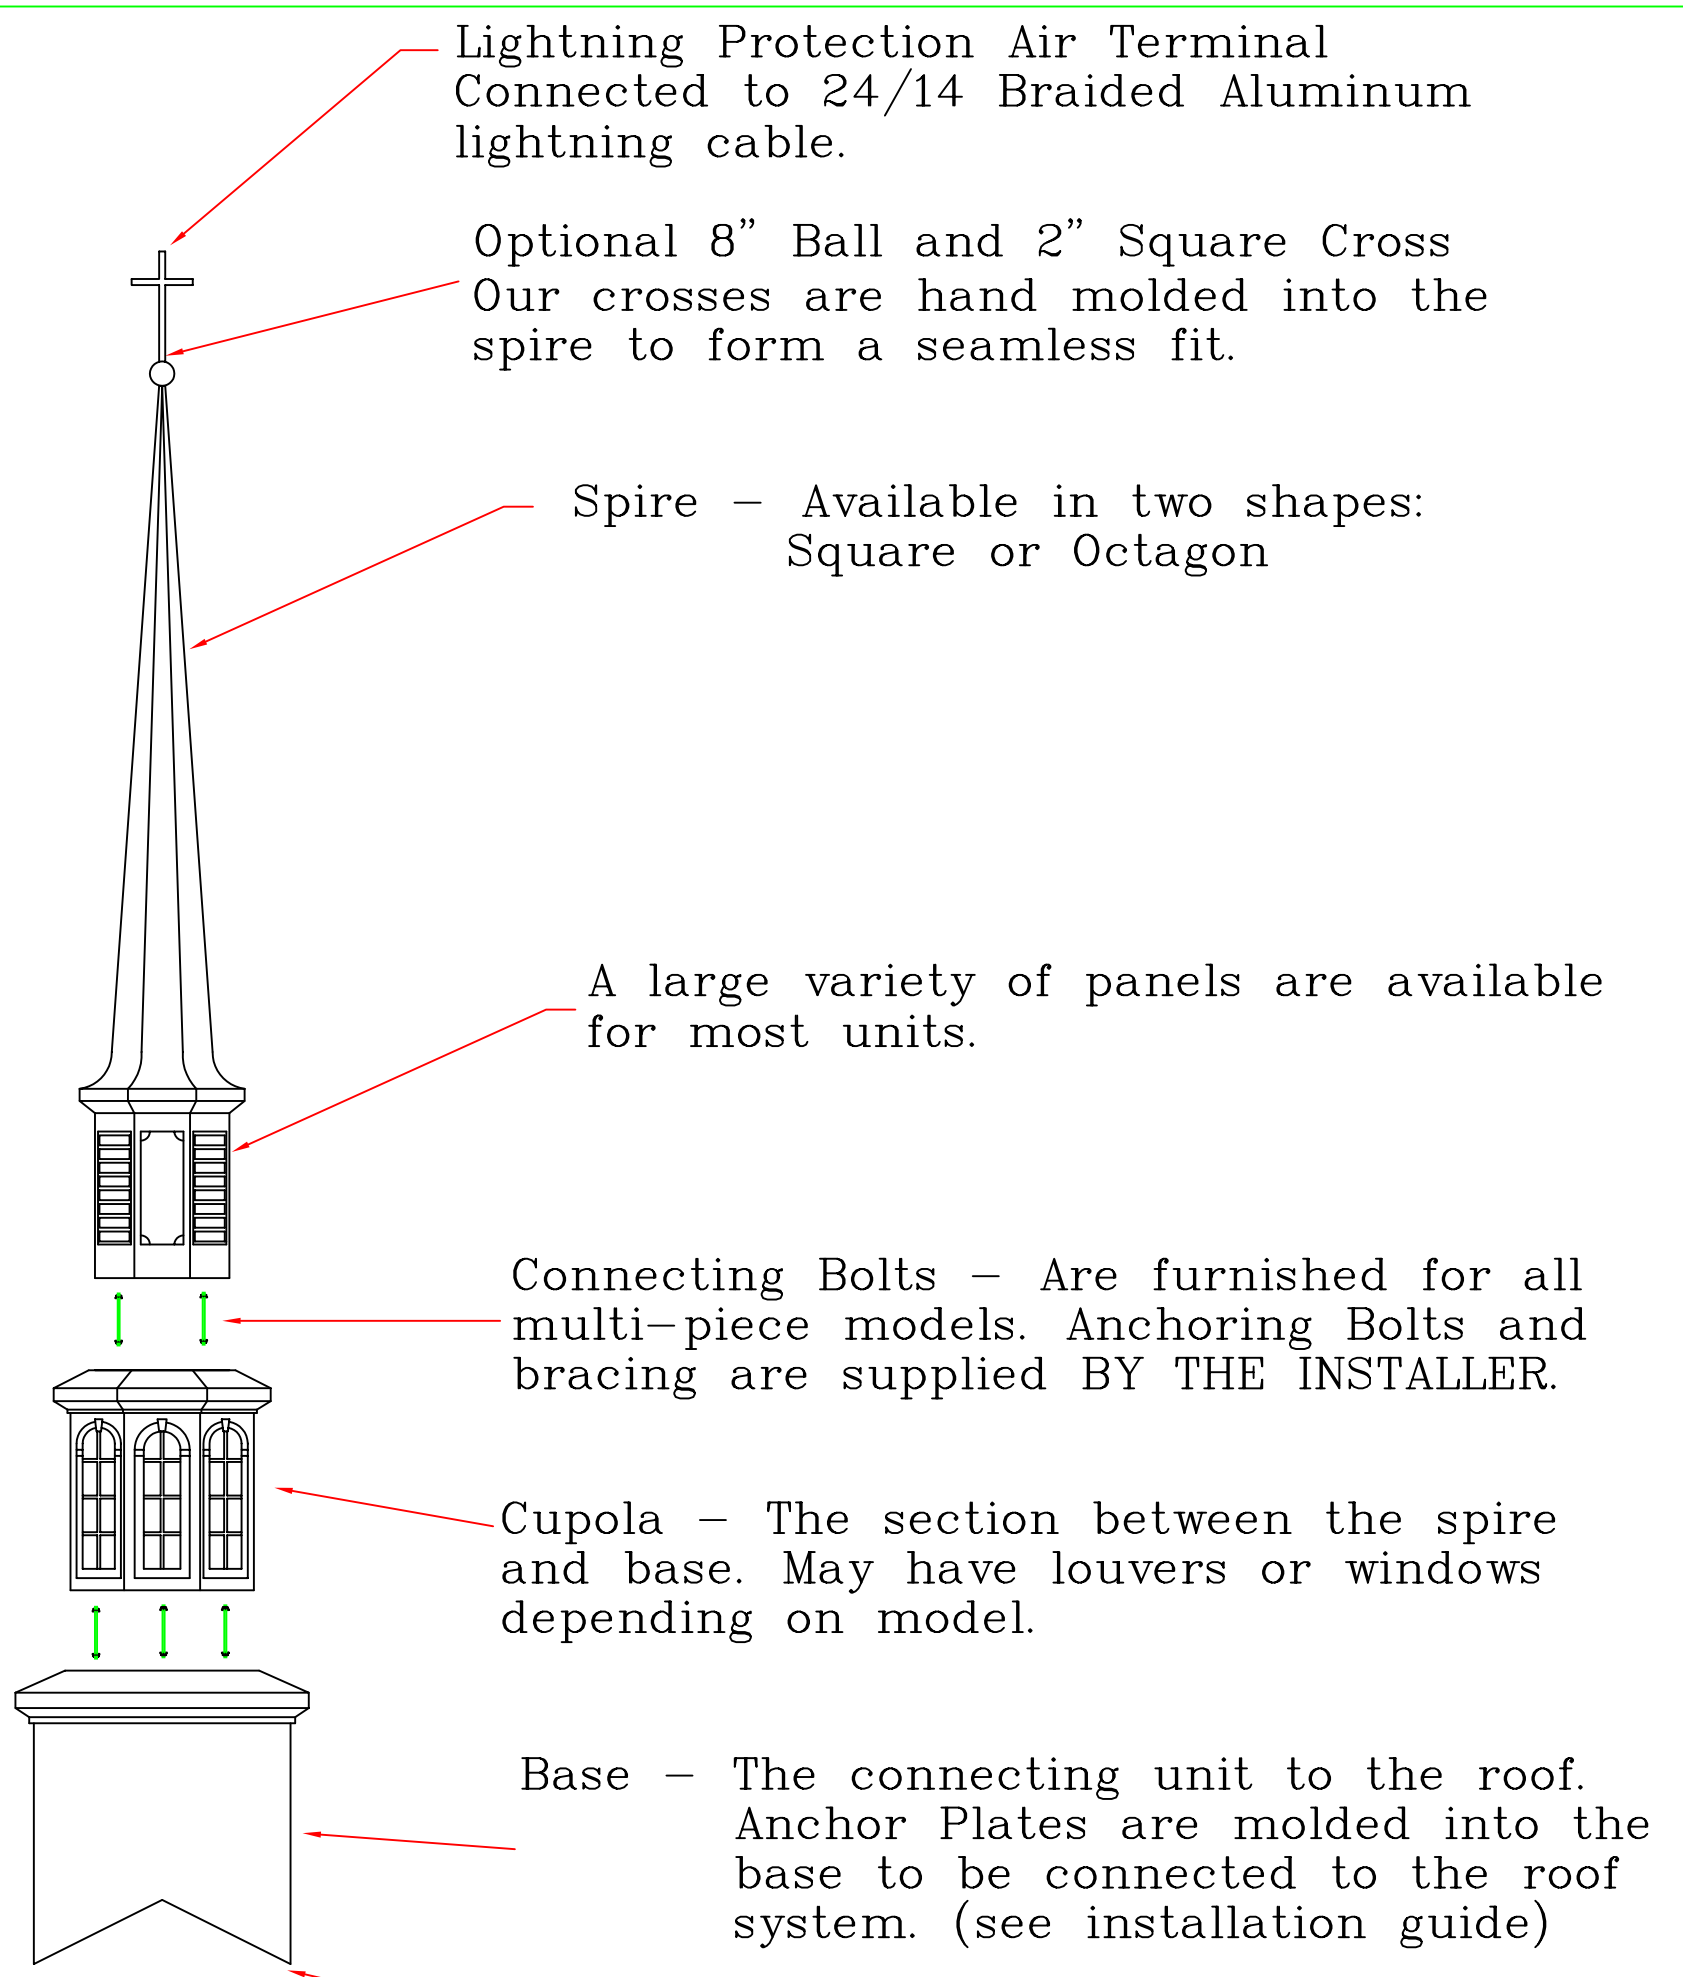

Lightning Protection Air Terminal
Connected to 24/14 Braided Aluminum
lightning cable.

Optional 8" Ball and 2" Square Cross
Our crosses are hand molded into the
spire to form a seamless fit.

Spire – Available in two shapes:
Square or Octagon

A large variety of panels are available
for most units.

Connecting Bolts – Are furnished for all
multi-piece models. Anchoring Bolts and
bracing are supplied BY THE INSTALLER.

Cupola – The section between the spire
and base. May have louvers or windows
depending on model.

Base – The connecting unit to the roof.
Anchor Plates are molded into the
base to be connected to the roof
system. (see installation guide)

Base Panels – Are available
in both Standard and Premium
selections. Standard panels are placed
on the front and sides with the rear
being a blank access panel.
Availability of panels on the front of
the base is dependent on the pitch.

Only Steeples with Octagon
Bases arrive with the pitch
pre-cut. The factory can
pre-cut square base models
if supplied with accurate
measurements.

* Pre -Cut pitches in square base
models is upon request only

(see optional panel page for more details)